

<b>Project</b>	<b>Type</b>
<b>Catalog #</b>	

## DESCRIPTION

For improved power supply loading, the Point2 LITE produces 85 lumens per foot and an impressive 165 modules per power supply. Use Point2 LITE in standard channel letter applications that require stunning color and long lifetime.

## FEATURES AND SPECIFICATIONS

- 5-year warranty
- Patented Quick Connect tabs - easiest and fastest system to install in the market! No need for cutting or splicing wires
- Suitable for damp locations


## CERTIFICATIONS

- UL Recognized (US and Canada) and CSA approved
- UL Classified (US and Canada) for retrofits
- Class 2 compliant




# The Point2™ LITE

## RIGHT LIGHT SERIES

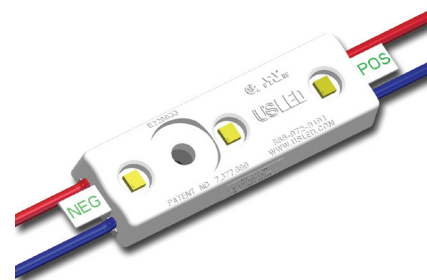

## OUTLINE DRAWING

Dimensions are in inches

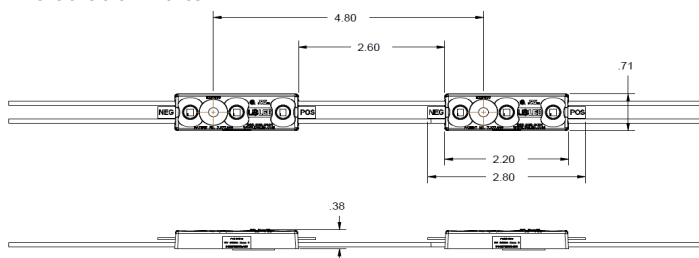

### ENERGY DATA

Input Voltage (V DC)	12
Module Level Power (W/ft)	1.08
System Level Power (W/ft)*	1.2
Delivered Lumens (Lm/ft)**	85
System Efficacy (Lm/W)	70
Viewing Angle (°)	120
Correlated Color Temp (K)	6300
LED L70 Lifetime (hrs)	> 100,000
Typical Stroke (in)***	6
Operating Temperature	(-40) to 60 °C / (-40) to 140 °F

\* System power consumption, which includes power supply losses  
\*\* Estimated light output under application operating conditions  
\*\*\* For 5 inch deep can

## ORDERING INFORMATION

Example: PL2-3-12-W

PL2	3	12	W
Series	LEDs per Module	Input Voltage	Color
PL2	3	12	W White

### POWER SUPPLY AND LOADING SPECS

	Min Ft	Max Ft	US LED Model Number
12W Load	4	11	PSA-12-12 (LED120A0012V10F)
60W Load	10	55	PSA-12-60 (LED120A0012V50F) PSA-12-60V (LEDINTA0012V50FO)

### PACKAGING SPECS

	Modules (feet)
Master Case	810 (270')
Inner Case	270 (90')
Tray	90 (30')