

Project	Type
Catalog #	

DESCRIPTION

With an astounding 135 lumens per foot, a 95% increase in lumens over the previous version, standard channel letter applications never looked so good! Point2 is beyond impressive and is the best all-around LED module on the market.

FEATURES AND SPECIFICATIONS

- 5-year warranty
- Patented Quick Connect tabs - easiest and fastest system to install on the market! No need for cutting or splicing wires
- Suitable for damp locations


CERTIFICATIONS

- UL Recognized (US and Canada) and CSA approved
- UL Classified (US and Canada) for retrofits
- Class 2 compliant




The Point2™

The Point2
RIGHT LIGHT SERIES

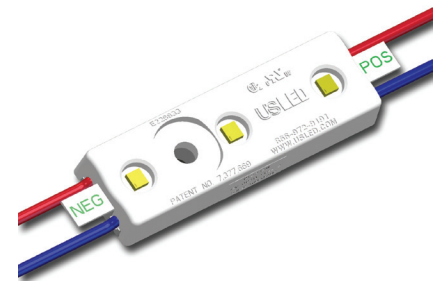

OUTLINE DRAWING

Dimensions are in inches

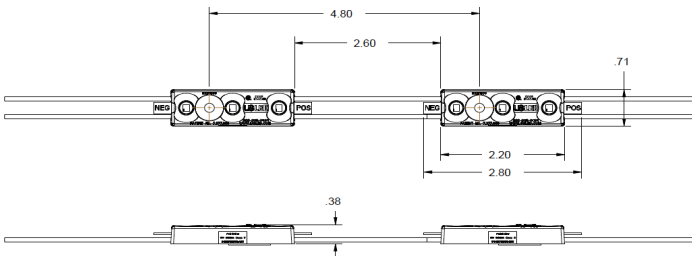

ENERGY DATA

Input Voltage (V DC)	12
Module Level Power (W/ft)	2.0
System Level Power (W/ft)*	2.2
Delivered Lumens (Lm/ft)**	135
System Efficacy (Lm/W)	61
Viewing Angle (°)	120
Correlated Color Temp (K)	6300
LED L70 Lifetime (hrs)	> 100,000
Typical Stroke (in)***	6
Operating Temperature	(-40) to 60 °C / (-40) to 140 °F

ORDERING INFORMATION

Example: PT2-3-12-W

PT2	3	12	W
Series	LEDs per Module	Input Voltage	Color
PT2	3	12	W White

* System power consumption, which includes power supply losses
** Estimated light output under application operating conditions
*** For 5 inch deep can

POWER SUPPLY AND LOADING SPECS

	Min Ft	Max Ft	US LED Model Number
12W Load	2	6	PSA-12-12 (LED120A0012V10F)
60W Load	5	30	PSA-12-60 (LED120A0012V50F) PSA-12-60V (LEDINTA0012V50FO)

PACKAGING SPECS

	Modules (feet)
Master Case	810 (270')
Inner Case	270 (90')
Tray	90 (30')

Specifications and dimensions subject to change without notice.

DATASHEET 02.03.2012