



WARNING


- The installation must only be performed by a licensed electrician.
- To prevent death, injury or damage to property this product must be installed in accordance to National Electric Code in the US or Canadian Electrical Code (CSA22.1) in Canada.
- Disconnect power before installing the product or servicing it.
- Wait until the lamp(s) have cooled down before installing or servicing the fixture.
- Make sure that the lamp fixture and surge arrester are grounded.
- Modification to the QubePAK2 fixture voids its warranty and UL Listing.



INSTALLATION INSTRUCTIONS

1. Remove fixture from carton.
2. Loosen the two captive screws opposite the hinge side.
3. With hinge to the left, open cover approximately 120 degrees.
4. Disconnect the Qube LED module wire harnesses from the power supplies.
5. Remove cover from hinge pins.
6. Verify power is disabled.
7. Attach supplied gasket to enclosure back, symmetrically around conduit opening, when mounting to a wall mount junction box.
8. Feed wires from supply through applicable feed through holes and mount fixture base to wall according to local codes using appropriate mounting hardware. Junction box, conduit, conduit fittings and mounting hardware are not supplied. Use fittings suitable for wet locations (Type 4 or 4x).
9. Wire fixture according to wiring diagram (figure 1) in accordance with the National Electrical Code and applicable local codes.
10. Mate Qube LED module wire harnesses to power supplies.
11. Slide cover onto base by aligning hinges.
12. Verify gasket is positioned around perimeter of base opening.
13. Close cover, use caution not to pinch wires, and secure with the two screws opposite the hinge.
14. Remove or relocate drain opening silicone rubber plugs depending on mounting orientation.
The drain openings should be facing down (see figure A).
15. Energize fixture.

DIMENSIONS
L 18.3 x W 9.0 x H 9.6
NW 14.9 lbs
GW 17 lbs

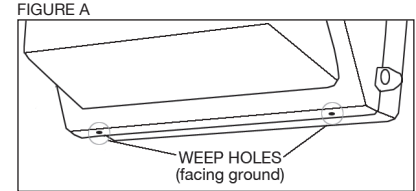

WIRING DIAGRAM

