

<b>Project</b>	<b>Type</b>
<b>Catalog #</b>	

## DESCRIPTION

Saver2 at 90 lumens per foot delivers 87% more lumens than the previous version, and can power up to 45 feet on a single 60W power supply. Saver2 is the perfect choice for those applications that need great light on a competitive budget.

## FEATURES AND SPECIFICATIONS

- 60 month warranty
- Patented Quick Connect tabs - easiest and fastest system to install on the market. No need for cutting or splicing wires
- Suitable for damp locations

## CERTIFICATIONS


- UL Recognized (US and Canada) and CSA approved
- UL Classified (US and Canada) for retrofits
- Class 2 compliant




# Saver2™


## Saver2 White

### RIGHT LIGHT SERIES

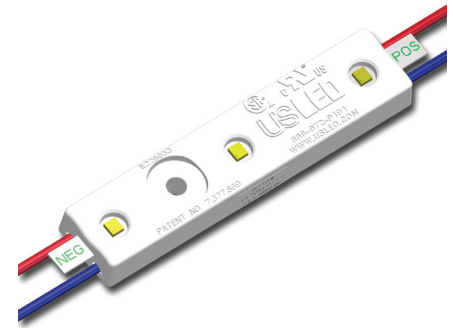

## OUTLINE DRAWING

Dimensions are in inches

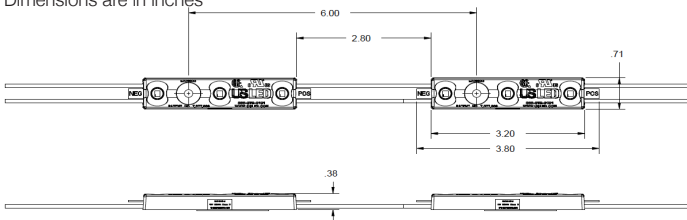

## ENERGY DATA

Input Voltage (V DC)	12
Module Level Power (W/ft)	1.32
System Level Power (W/ft)*	1.47
Delivered Lumens (Lm/ft)**	90
System Efficacy (Lm/W)	61
Viewing Angle (°)	120
Correlated Color Temp (K)	6300
LED L70 Lifetime (hrs)	> 100,000
Typical Stroke (in)***	6
Operating Temperature	(-40) to 60 °C / (-40) to 140 °F

\* System power consumption, which includes power supply losses  
 \*\* Estimated light output under application operating conditions  
 \*\*\* For 5 inch deep can

## ORDERING INFORMATION

Example: SV2-3-12-W

SV2	3	12	W
Series	LEDs per Module	Input Voltage	Color
SV2	3	12	W White

## POWER SUPPLY AND LOADING SPECS

	Min Ft	Max Ft	US LED Model Number
12W Load	2	9	PSA-12-12 (LED120A0012V10F)
60W Load	8	45	PSA-12-60 (LED120A0012V50F) PSA-12-60V (LEDINTA0012V50FO)

## PACKAGING SPECS

	Modules (feet)
Master Case	666 (333')
Inner Case	222 (111')
Tray	74 (37')