

INTRODUCING THE LSF1 LED WRAP



With a streamlined form factor that's new but feels familiar, the LSF1 delivers superior illumination by utilizing advanced LED technology. Designed for complete versatility, it's ideal for lighting up educational facilities, offices, industrial areas, and other commercial spaces.

PRODUCT FEATURES

- Available in 4 ft. or 8 ft. models with lumen packages up to 8,520L and 142 LPW.
- Low-profile design, only 3.38" high.
- Suspended or surface mounted.
- Exclusive back plate is designed to facilitate easier installation in the field.
- Available with Bluetooth lighting controls and dynamic tunable white technology.

CONTEMPORARY STYLE.
EXCEPTIONAL VALUE.



USLED[™]
Always the Right Choice!



AVAILABLE WITH
**SMART
BLU**[™]

DEFINING THE STANDARD OF VALUE

The overall value of the LSF1 LED luminaire is hard to overlook. Quality, durability, and optical performance are all signatures of the engineering design. With its mounting flexibility and pleasing visual appearance, it literally sets itself apart from the competition. Efficiency and high-quality illumination make the LSF the preferred choice for meeting the most rigorous requirements for energy consumption and sustainable design.

Catalog Number	Size	CCT	Wattage	Lumens	L70 Calculated Life
LSF1-4-UNVL-25-2	4'	3000K, 3500K, 4000K or 5000K	25.0W	Up To 3,430L	161,000 Hours
LSF1-4-UNVL-30-2	4'	3000K, 3500K, 4000K or 5000K	28.8W	Up To 4,075L	161,000 Hours
LSF1-8-UNVL-50-2	8'	3000K, 3500K, 4000K or 5000K	51.1W	Up To 8,520L	161,000 Hours

SIMPLE DESIGN. BOLD PERFORMANCE.

The aesthetic design of the LSF1 easily blends with an existing architectural plan. It's configurable to allow one-for-one replacement of existing fluorescent wraps without disrupting the look of the overall space. The low-profile housing offers 4 ft. and 8 ft. models that accommodate lumen packages up to 8,520 lumens. Its proprietary lens is engineered for volumetric distribution that creates uniform light for increased comfort and maximizes spacing. The back plate for surface mounting assists with accelerated installations out in the field. With 80+ CRI and L70 calculated lifetimes surpassing 161,000 hours, the LSF will make a significant impact in your space for years to come.

PRODUCT APPLICATIONS

- Classrooms
- Conference Rooms
- Office Spaces
- Hallways/Corridors
- Industrial Areas
- Retail Areas
- Commercial Spaces

SURFACE (STANDARD)




SUSPENDED (OPTIONAL)




Model	Net Weight
4 ft.	10.8 lbs. (4.9kg)
8 ft.	21.5 lbs. (9.8kg)



LSF1-4

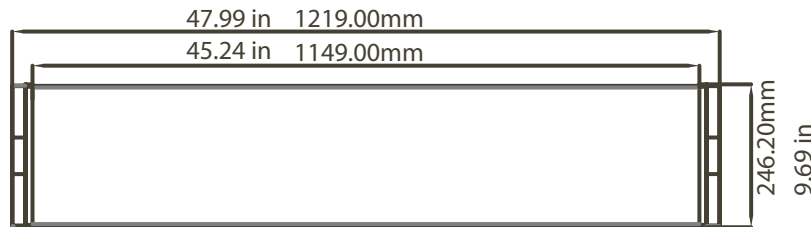

LSF1-8

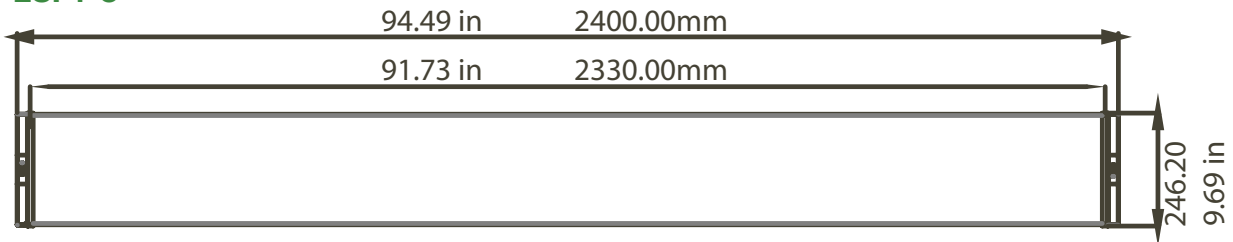

Simple, Affordable, and Effective
Bluetooth Lighting Control
iOS and Android Compatible APP

