


USLV Square Vanity

LED Decorative Indoor Light

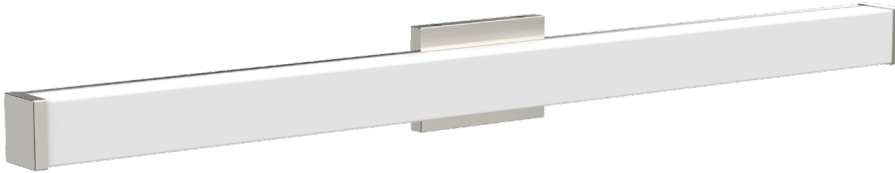

Key Features

- The ideal decorative indoor lighting solution for hospitality and multi-family applications.
- Suitable for use in indoor damp locations.
- High CRI for task lighting.
- Available in lengths up to 48 inches.

Electrical

- 120-277VAC input.
- 0-10V dimming standard.
- Power factor: >0.70 and THD <20%.

Mounting

- Ready to be wall mounted or mounted to a standard 4" J-Box.
- Connections can be made in the housing and installed without the junction box canopy if a junction box is not available and codes allow.

Construction

- Die-formed cold-rolled steel in a beautiful satin nickel finish.
- White acrylic diffusing lens is of highly transmissive material to minimize LED image and create uniform light distribution.

Optics

- Industry-leading LEDs with 3000K CCT (minimum 90 CRI).
- Lumen Maintenance: $\geq 50,000$ hours (L70) ¹

Warranty

- Backed by US LED's Five-Year Warranty.

Project	Date
---------	------

Catalog Number	Type
----------------	------

Product Performance Summary

Lumen Output	Up to 2,240 lumens
Efficacy	Up to 85 LPW
CRI	≥ 90 CRI
Available CCT	3000K
Warranty	Five-Year Warranty

Product Overview

See yourself in the best light with US LED's USLV vanity light tailored for hospitality applications. This decorative indoor LED light combines functionality and style, making it an ideal choice for task lighting. The white acrylic diffuser ensures uniform and soft illumination. With elegant finish options like satin nickel and oil rubbed bronze, US LED offers a versatile lighting solution that can effortlessly complement any space.

Product Applications

- Hospitality
- Multi-family
- Restaurants
- Hallways/Corridors
- Utility Areas
- Task Lighting

Product Certifications

- ETL Listed
- Complies with UL1598 and CSA 22.2
- Suitable for Indoor Locations Only
- RoHS Compliant



Ordering Information

Example: USLV-4-30-N

USLV			
Series	Length/Wattage	CCT	Finish
2	24 in. 14W	30	N Satin Nickel
3	34 in. 20W		
4	48 in. 26W		


1. US LED product 'Lifetimes' refer only to the LED light engine, not the power source, and are based on the Illuminating Engineering Society's TM21 Projected Lumen Maintenance methodology at a 25° C / 77° F ambient temperature. The lifetimes are solely meant to be a guide for expected LED degradation and not a warranty or predictive of their actual life, which can be affected by ambient temperatures and other factors.

USLV Vanity Light

LED Decorative Indoor



Dimensions

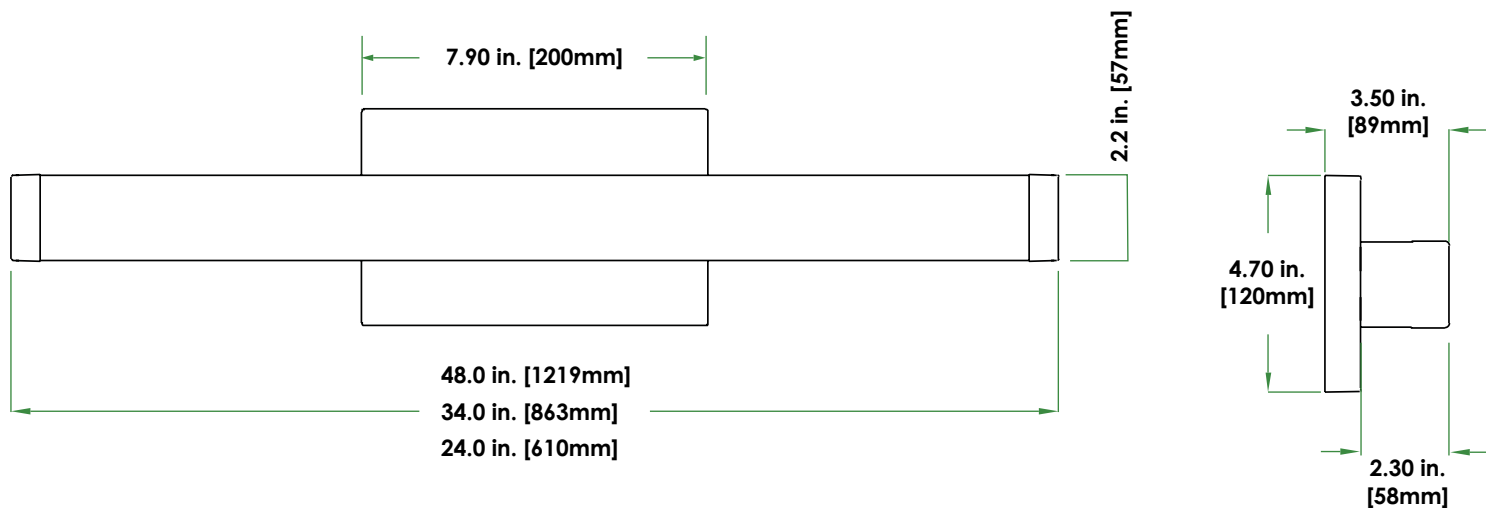

Performance Data

Model	Length	Wattage	Delivered Lumens	Efficacy	Available CCT	CRI	L70 Calculated Life
USLV-2-30-N	24"	13.2W	1,120	85 LPW	3000K	≥ 90 CRI	≥ 50,000 Hours
USLV-3-30-N	34"	20.2W	1,620	80 LPW	3000K	≥ 90 CRI	≥ 50,000 Hours
USLV-4-30-N	48"	26.4W	2,240	85 LPW	3000K	≥ 90 CRI	≥ 50,000 Hours