

ULTH Wall Washer

LED Track Head Lighting



Key Features

- Stylish LED track head with integrated driver.
- Modular design that features different optical accessories for custom lighting applications.
- Proprietary joint can hold the light at any position without a malfunction.
- Complete 360° horizontal rotation adjustment and 90° vertical aiming.

Electrical

- 120-277VAC input; 50-60Hz.
- 0-10V dimming capable with integrated control dial.
- Power factor: >0.90 and THD <20%.
- Operating temperature: -20°C to 45°C (-4°F to 113°F).

Mounting

- Ready to be used with compatible track systems (consult factory).

Construction

- Die-cast aluminum housing optimizes thermal management to ensure long-term performance.
- Proprietary lensing offers soft, uniform distribution while eliminating glare.
- Multiple push-lock optical accessories allow for easy customization in the field.

Optics

- Industry-leading LEDs with 3000K, 4000K, and 5000K CCT (minimum 80 CRI).
- Wall Washing: 10° + Wall Washer Filter (Accessory Sold Separately)
- Lumen Maintenance: ≥ 50,000 hours (L70) ¹

Warranty

- Backed by US LED's Five-Year Warranty.

Project	Date
---------	------

Catalog Number	Type
----------------	------

Product Performance Summary

Lumen Output	Up to 2,750 lumens
Efficacy	Up to 81 LPW
CRI	≥ 80 CRI
Available CCT	3000K, 4000K, & 5000K
Warranty	Five-Year Warranty

Product Overview

The ULTH wall-mount track head is a stylish and compact LED light that will easily adapt any retail and hospitality environment. An integrated driver contributes to a sleek form factor while optical accessories allow for even more customization. Featuring an adjustable beam mechanism, the head can be precisely adapted to get the light where it's needed the most.

Product Applications

- Restaurants
- Hospitality
- Retail Stores
- Museums
- Art Galleries
- General Commercial

Product Certifications

- Complies with UL1598 and CSA 22.2
- Suitable for dry locations.
- RoHS Compliant



Ordering Information

Example: **ULTH-1-50-30-H-WH**

ULTH					
Series	Variant	CCT	Wattage	Mounting Position	Finish
	1 Standard	30 3000K	30 30W	H Horizontal Mount	WH White
		40 4000K	35 35W		
		50 5000K			


Accessories			
USTS-WF	Wall Washer Filter	USTS-WL	Wide Line Filter
USTS-CF15	Circular Small Filter	USTS-SHL	Honeycomb Louver + Wall Washer
USTS-CF16	Circular Big Filter	USTS-WW	Wall Washer
USTS-SF	Square Big Filter		

¹. US LED product 'Lifetimes' refer only to the LED light engine, not the power source, and are based on the Illuminating Engineering Society's TM21 Projected Lumen Maintenance methodology at a 25° C / 77° F ambient temperature. The lifetimes are solely meant to be a guide for expected LED degradation and not a warranty or predictive of their actual life, which can be affected by ambient temperatures and other factors.

ULTH Wall Washer

LED Track Head Lighting

Dimensions

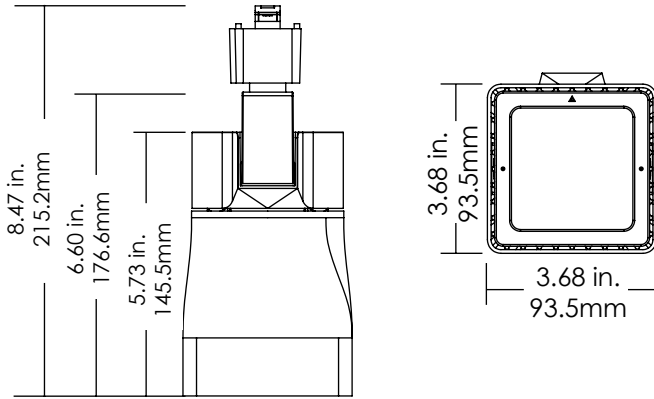

Performance Data

Model	CCT	System Level Power	Delivered Lumens	Efficacy	L70 Lifetime
ULTH-1-30-30-H-WH	3000K	30.0W	2,300	77 LPW	>50,000 Hours
ULTH-1-30-35-H-WH	3000K	35.0W	2,600	74 LPW	>50,000 Hours
ULTH-1-40-30-H-WH	4000K	30.0W	2,436	81 LPW	>50,000 Hours
ULTH-1-40-35-H-WH	4000K	35.0W	2,750	79 LPW	>50,000 Hours
ULTH-1-50-30-H-WH	5000K	30.0W	2,436	81 LPW	>50,000 Hours
ULTH-1-50-35-H-WH	5000K	35.0W	2,750	79 LPW	>50,000 Hours

Accessories




USTS-WF
Wall Washer Filter
Accessory



USTS-WL
Wide Line Filter
Accessory




USTS-CF15
Circular Small Filter
Accessory



USTS-SHL
Honeycomb Louver
+ Wall Washer
Accessory



USTS-CF16
Circular Big Filter
Accessory



USTS-WW
Wall Washer
Accessory



USTS-SF
Square Big Filter
Accessory

